


**RUIDE**

# ROBOT SLAM



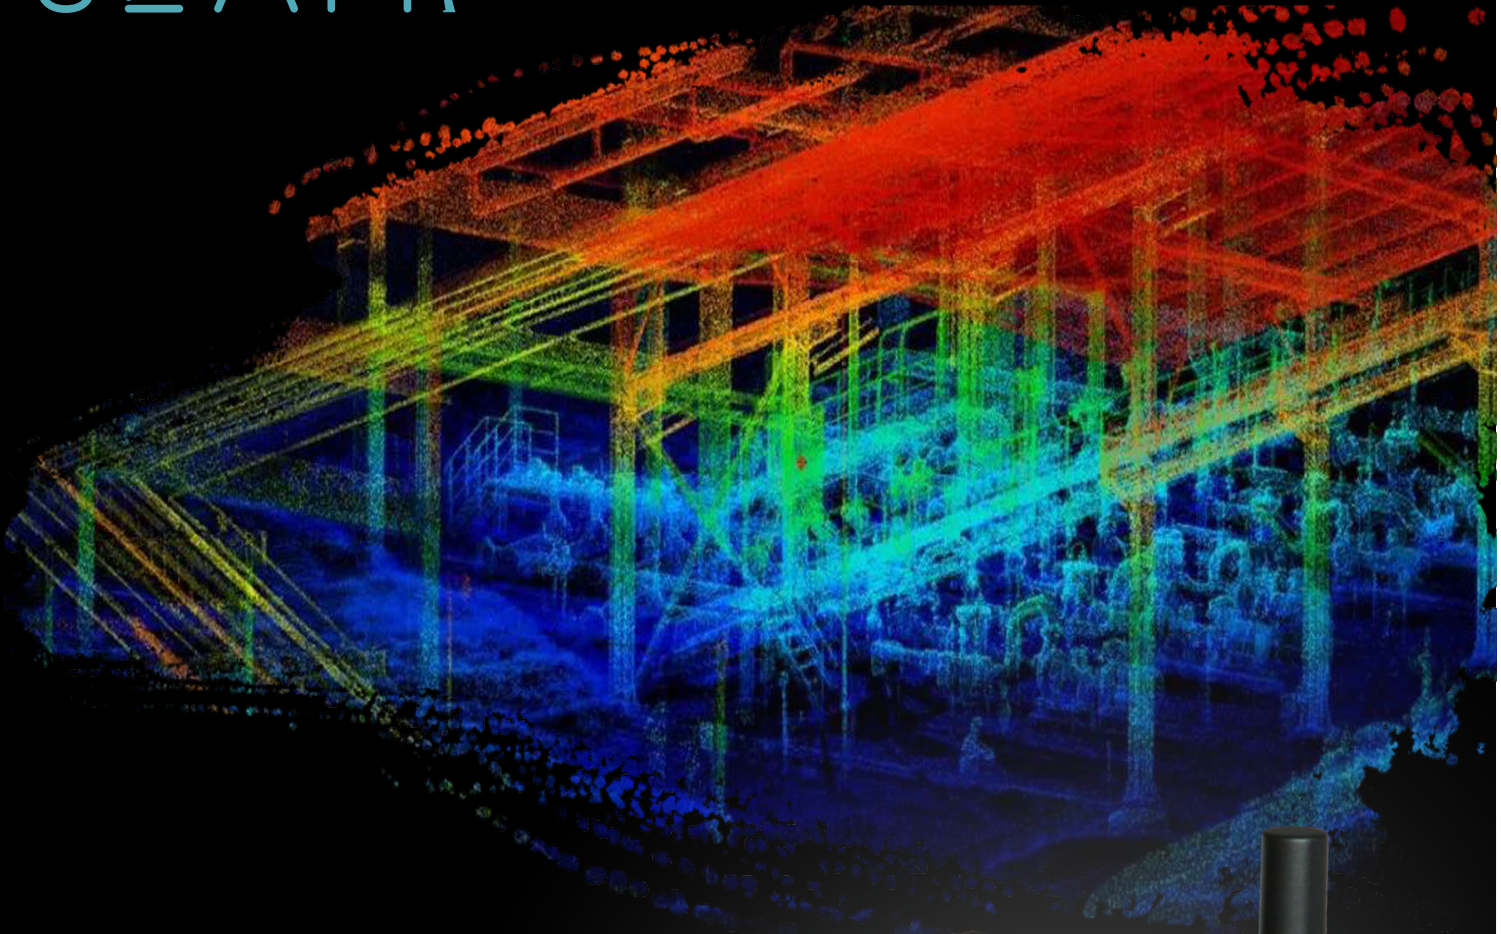

## Illustration

### GCP record button

helps to record control point directly when not connected to APP

### main control button

to start/stop scans and initialize, status identified by LED colors

### fill-in light (option)

supplements lighting when working in the dark or recording pano



### pano camera (option)

2-lens fisheye and 18MP, captures left&right for less occlusion

### LED screen

device status and commands to display, interactive and practical

### SD card slot

128GB default, extendable to 512GB max., ready for direct copy

### GNSS antenna


collaborates with onboard GNSS to provide centimeter level positioning

### SIM card slot

Nano SIM card to fit, supports CORS network access

### target base plate

helps to record GCPs and ready for fitting fill-in light kit

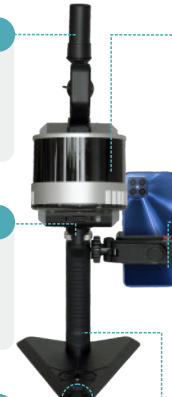

### laser sensor

range 120m and point rate 640,000 points/sec max.

### smartphone holder

enables one hand free when another is occupied in operation

### handheld grip

left and right to fit smartphone holder for checking at ease




## Platforms




### Handheld

ready to work in indoor, outdoor and underground environments



### Backpack

easy to carry and well fits long-time working indoors and outdoors




### AI Robot Dog

wireless remote scanning of potentially hazardous zones




### USV-based

to scan shoreside and integrate with underwater topography



### SUV-based

mounted onto a car for entry-level automobile mapping





### UAV-based

aerial perspective to scan building top which handheld mode cannot



## Backpack 3-in-1

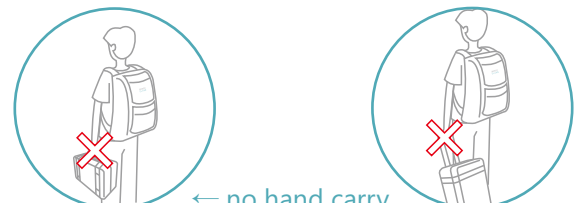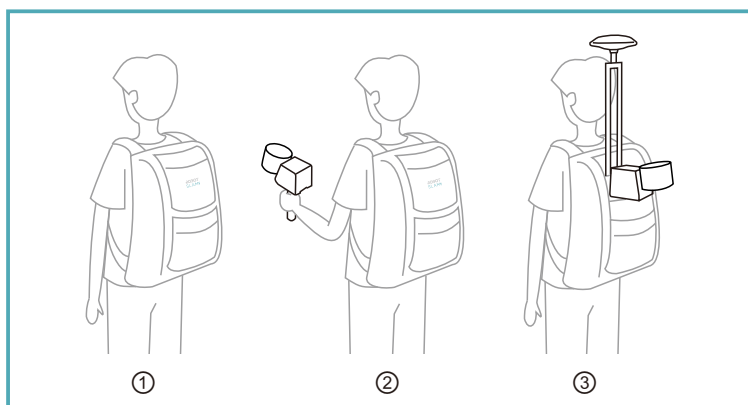


← no hand carry  
no pulling on the ground →

### when 3 becomes 1

- ① storage packing
- ② handheld mode
- ③ backpack mode

## APP&Software



### Smartphone APP-RobotSLAM Palm

- CORS settings
- task timer
- status display
- storage info
- fieldwork control
- device registration

### Post Processing Software-RobotSLAM Engine

- coordinate system transformation
- auto/manual optimization
- instant loading of mass data
- H.&V. accuracy verification
- loop closure review
- enable RTK for adjustment
- point cloud classification
- processing replay
- point rendering
- 3D measurement
- pano overlay display
- global registration
- auto denoising
- sectional view
- X-ray rendering

## Computer Configuration

Requirement	Minimum	Recommended
Graphics Card	Windows10/Windows11 64-bit	
CPU	GTX-3060/RX6600M or above (NVIDIA series recommended)	
Internal Memory	Intel i7-11800H/AMD R7-5800H or above	Intel i7-12700H/AMD R7-6800H or above
RAM	16GB or above	32GB or above
SSD	1TB or above	2TB or above

**Note:** for faster data loading, it's recommended to process the data directly with SSD instead of HDD.

## Unboxing





<b>A</b> handheld (handle, base plate)	1	<b>B</b> GNSS antenna & cable	1
<b>C</b> smartphone holder	1	<b>D</b> shoulder strap	1
<b>E</b> main cable	1	<b>F</b> battery compartment	1
<b>G</b> rechargeable battery	2	<b>H</b> battery charger & cable	1
<b>I</b> Ethernet cable	1	<b>J</b> USB flash drive	1
<b>K</b> micro SD card	1	<b>L</b> SD card reader	1
<b>M</b> cleaning cloth	1	<b>N</b> hand-carry case	1
<b>O</b> pano camera (option)	1	<b>P</b> fill-in light & charging cable	1


**Note:** the above is applicable for RobotSLAM standard only. Please refer to the configuration list for more details of different models.

# Applications



## Underground Mining

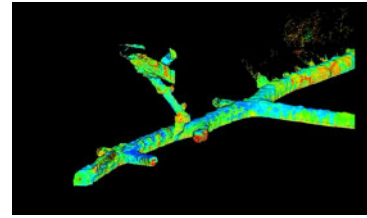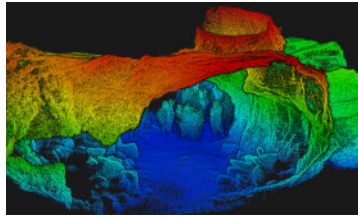



## Building Elevational Surveying

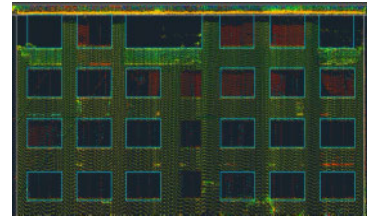

## Basement Parking Digitization


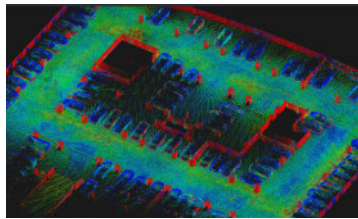
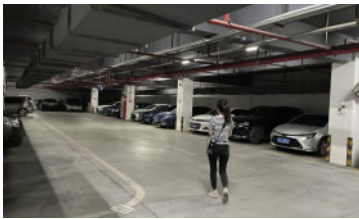


## Forestry Investigation

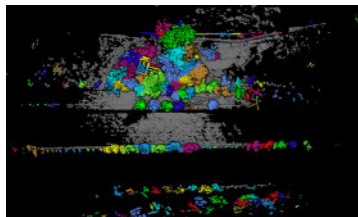
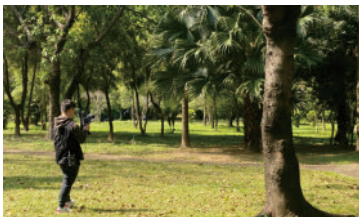


ID	PointCloudID	TreeDiameter	TreeHeight	CrownCircumfer	CrownArea	CrownVolume	CHM
1	48308	38.817	2.888	0.741	0.401	0.431	47
2	48309	37.496	2.959	2.687	6.464	6.464	35
3	48310	31.279	2.334	0.133	0.043	0	30
4	528	40.984	6.936	4.263	14.948	45.487	23
5	4285	40.981	5.978	2.637	5.543	8.387	27
6	30861	52.032	10.334	4.731	17.911	1.47	3
7	53843	34.696	2.738	0.932	0.275	0.272	38
8	2381	48.857	5.223	4.086	10.984	26.756	19
9	40472	46.949	2.423	0.101	0.101	0.109	9
10	57807	38.535	2.468	0.795	0.496	0.496	31
11	111366	30.035	2.034	0	0	0	109
12	82	39	2.839	0.357	0.1	0.176	84
13	18134	21.18	2.235	5.829	26.688	68.429	95
14	108187	38.143	3.078	1.026	0.807	0.768	24
15	401313	39.988	4.024	0.384	0.073	0.073	57
16	50211	38.034	3.81	0.457	0.164	0.131	47
17	171	27.68	4.463	2.687	6.236	15.328	71
18	41282	42.738	2.182	0.089	0.272	0.207	35
19	-13334	39.996	2.823	1.787	2.909	2.909	33
20	41295	27.532	1.188	3.226	8.902	6.162	48
21	-338	29.247	5.9	3.07	7.4	18.747	63

## Stockpile Volume Calculation

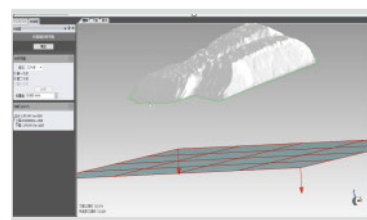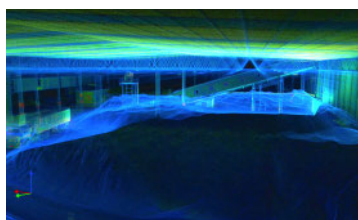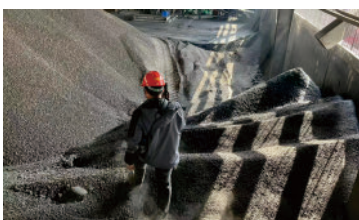

## Shoreside Survey + USV Bathymetry

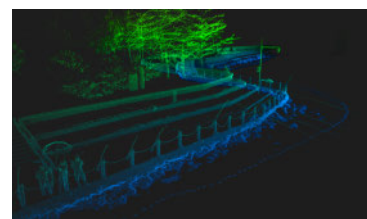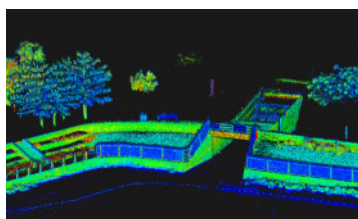

 **Outputs**





## Specification

Series	Robot SLAM
Model	RobotSLAM basic, RobotSLAM standard, RobotSLAM professional
Laser Scanner	16-channel <sup>①</sup>
Measurement Rate	Max. 320,000 points/sec <sup>①</sup>
Laser Safety Class	Class 1(IEC 60825-1:2014) eye-safe
Laser Wavelength	905 nm
Echo Mode	8-bit, dual return
Measuring Range	0.05-120 m
Scanning Rate	10 Hz
Scanning FOV	360°x 285°
Horizontal Angle Resolution	0.18° (10 Hz)
Vertical Angle Resolution	2°
Relative Accuracy	best up to 1 cm
GNSS Differential <sup>②</sup>	GPS+Glonass+Beidou+Galileo multi-constellation tracking
Signal Tracking <sup>②</sup>	555 channels
RTK Positioning Accuracy <sup>②</sup>	RMS 1 cm+1 ppm
CORS Access <sup>②</sup>	nano SIM card slot built in
Positioning Data Refresh Rate <sup>②</sup>	max. 100 Hz
Absolute Accuracy <sup>②</sup>	best up to 3-5 cm
Scanning Principle	laser sensor 360° mechanical rotation
Accumulated Mileage Error	0.1%-0.2% (under the condition without loop closure)
Housing Material	aviation-grade aluminum, with high protection level and anti-interference capability
Weight	1.9 kg (handheld only)
Dimension	262x230x146 mm
System Consumption	20 w
Power Supply	dual external Li-ion battery, hot swappable
Battery Unit	DC 14.4V, 6875mAh, 99Wh
Endurance	single battery ≥2 hours, dual batteries ≥4 hours
IP Protection	IP 54
Temperature	-20~65°C (operating), -40~85°C (storage)
Device Connection	Wi-Fi or Ethernet cable
Data Storage	built-in SSD, 512GB (extendable upon request); SD card (removable), 128GB
Data Download	via Ethernet cable, WiFi or SD card
Panoramic Camera	2-lens, fisheye, 360°, image pixels 18 MP, video pixels 5.7k
Software Package	RobotSLAM Palm (smartphone APP), RobotSLAM Engine (PC)
Processing Method	post-processing on PC
Process Time	approx. 1-2 times of data acquisition

### Note:

- ① to expect higher point rate like 640,000 points/sec max., 32-channel laser sensor is also available upon request, and that's RobotSLAM Plus series.
- ② GNSS differential performance is only applicable to the standard and professional versions. In outdoor scenes with moderate satellite signals coverage, it is recommended to activate GNSS RTK for positioning, which may help much to eliminate control points record and measurement.



## Options

Model	RobotSLAM basic	RobotSLAM standard	RobotSLAM professional
Handheld Components	√	√	√
Control Point Record Button	√	√	√
Built-in GNSS Module	–	√	√
GNSS Antenna	–	√	√
LED Screen	√	√	√
Smartphone Holder	√	√	√
Smartphone APP	√	√	√
Pano Camera	option	option	option
Fill-in Light <sup>①</sup>	option	option	option
Backpack Kit	–	–	√ <sup>②</sup>
AI Robot Dog Mount Kit <sup>③</sup>	–	option	option
USV-based Mount Kit <sup>③</sup>	–	option	option
SUV-based Mount Kit <sup>③</sup>	–	option	option
UAV-based Mount Kit <sup>③</sup>	–	option	option

### Notes:

- ① fill-in light and 360° pano camera are bundled as a visual module.
- ② the backpack kit includes a white plate antenna and a longer GNSS antenna cable; the backpack 3-in-1 magic tactically provides two working modes in one package: handheld and backpack, plus the storage function. No carrying case or trolley suitcase needed.
- ③ AI Robot Dog Mount kit, USV-based Mount kit, SUV-based Mount kit and UAV-based Mount kit are all optional accessories, available upon request.